


Android UI Testing

Espresso

Different approach to Software Testing

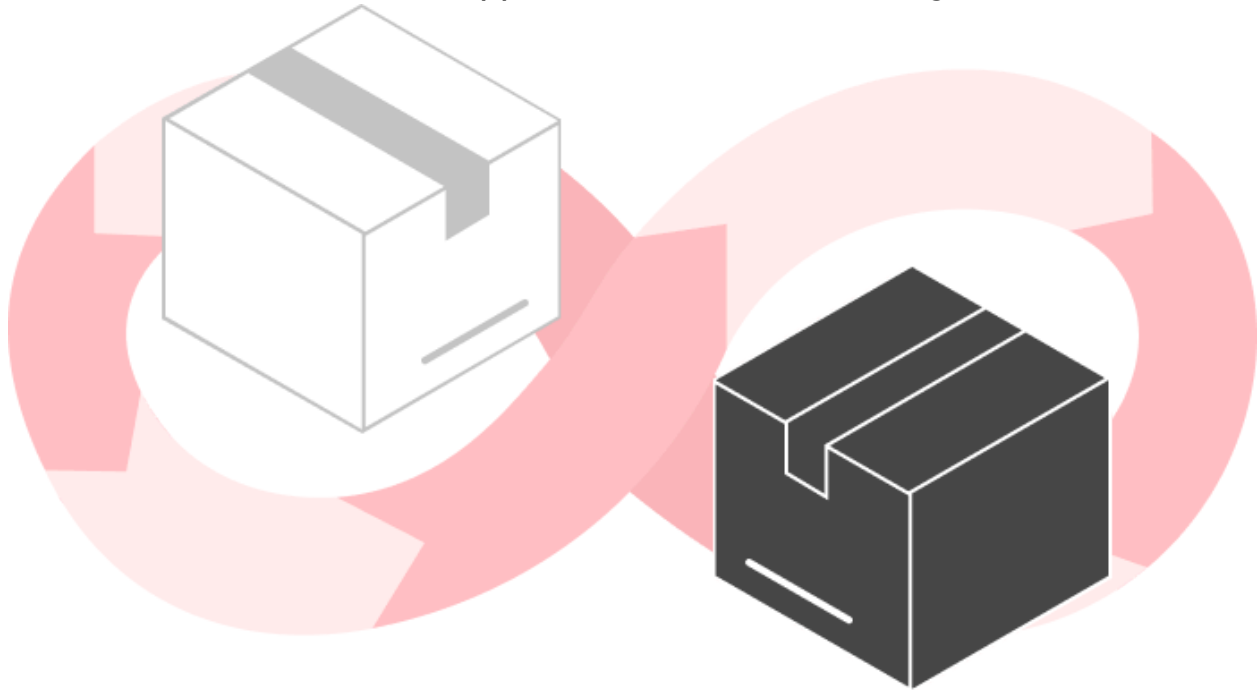

BlackBoxTesting	WhiteBoxTesting
Internalstructure/implementation oftheitembeingtestedisnot known to the tester. Only the external design and structure are tested.	Internalstructure/implementation oftheitembeingtestedisknown to the tester. Implementation and impact of the code are tested.

Instrumented Tests

Instrumented tests run on an Android device, either **physical** or **emulated**. The app is built and installed alongside a test app that **injects commands** and **reads the state**. Instrumented tests are usually **UI tests**, launching an app and then interacting with it.

Some libraries that can be used for Intent testing

1. *Espresso*


<https://developer.android.com/training/testing/espresso>

2. *Robotium*

<https://github.com/RobotiumTech/robotium>

3. *UI Automator*

<https://developer.android.com/training/testing/other-components/ui-automator>

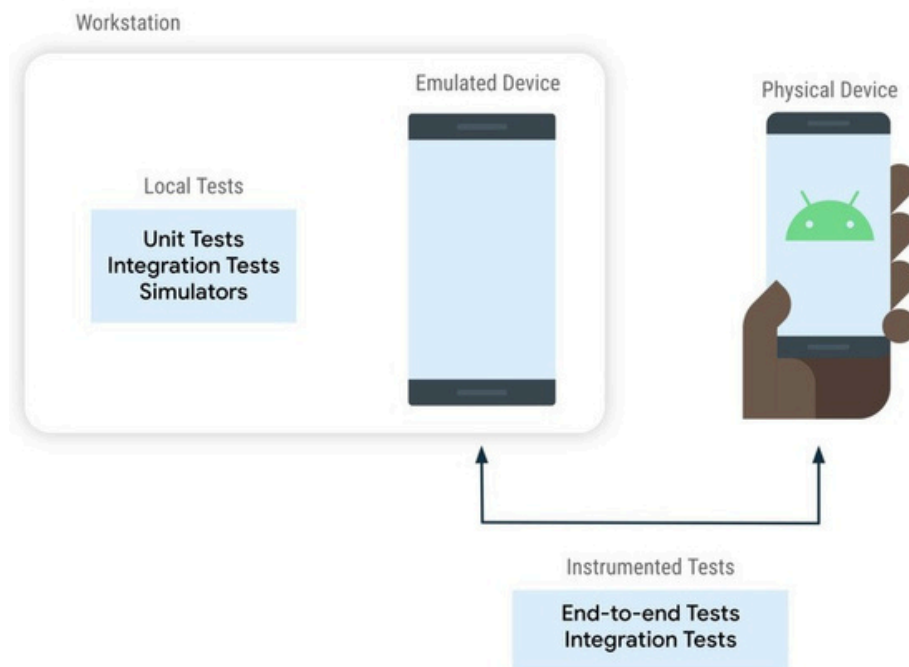

Lab 7 Instructions

Espresso

1. Clone the repo <https://github.com/iAniket23/Android-UI-testing.git>
2. Make sure these **dependencies** are present in the **app Gradle (build.gradle(Module:app)) file**. If it is not present in the build.gradle file then add these dependencies and **sync** the build.gradle file..

```
Java
testImplementation("junit:junit:4.13.2")
androidTestImplementation("androidx.test.ext:junit:1.1.5")
androidTestImplementation("androidx.test.espresso:espresso-core:3.5.1")
```

3. We want to create UI tests for our **MainActivity** class as it is our UI class
4. Under **com.example.androiduitesting(androidTest)** folder, create a new class '*MainActivityTest*' to test the UI functionalities.
5. Let's add some **decorators**

The AndroidJUnitRunner class is a JUnit test runner that lets you run instrumented JUnit 4 tests on Android devices, including those using the Espresso, UI Automator, and Compose testing frameworks.

The test runner handles loading your test package and the app under test to a device, running your tests, and reporting test results.

```
Java
@RunWith(AndroidJUnit4.class)
@LargeTest
public class MainActivityTest {

}
```

6. Now in order to test MainActivity we need to make a **'Rule'**
This rule provides functional testing of a single activity. The rule launches the chosen activity before each test annotated with @Test.
ActivityScenario provides APIs to start and drive an Activity's lifecycle state for testing.

```
Java
@Rule
public ActivityScenarioRule<MainActivity> scenario = new
ActivityScenarioRule<MainActivity>(MainActivity.class);
```

7. Now we are set to **write our first Test**

We will click on the Add City Button and enter the name of the city and then we will check if that city is displayed. If the city is displayed then the test should pass else it should fail

```
Java
@Test
public void testAddCity(){
    // Click on Add City button
    onView(withId(R.id.button_add)).perform(click());

    // Type "Edmonton" in the editText

    onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmonton"));

    // Click on Confirm
    onView(withId(R.id.button_confirm)).perform(click());

    // Check if text "Edmonton" is matched with any of the text
    displayed on the screen
    onView(withText("Edmonton")).check(matches(isDisplayed()));
}
```

8. Now we will **write our second test** -

We will add cities and then click on Clear All button, if the cities displayed are removed then test should pass else it should fail

Java

@Test

```
public void testClearCity(){
    // Add first city to the list
    onView(withId(R.id.button_add)).perform(click());

    onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmonton"));
    onView(withId(R.id.button_confirm)).perform(click());

    //Add another city to the list
    onView(withId(R.id.button_add)).perform(click());

    onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Vancouver"));
    onView(withId(R.id.button_confirm)).perform(click());

    //Clear the list
    onView(withId(R.id.button_clear)).perform(click());
    onView(withText("Edmonton")).check(doesNotExist());
    onView(withText("Vancouver")).check(doesNotExist());
}
```

9. Test number three -

We see if the city “Edmonton” that we add is located at position 0 of the list

```
Java
@Test
public void testListView(){
    // Add a city
    onView(withId(R.id.button_add)).perform(click());

    onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmonton"));
    onView(withId(R.id.button_confirm)).perform(click());

    // Check if in the Adapter view (given id of that adapter view),
    there is a data
    // (which is an instance of String) located at position zero.
    // If this data matches the text we provided then Voila! Our test
    should pass
    // You can also use anything() in place of
    is(instanceOf(String.class))

    onData(is(instanceOf(String.class))).inAdapterView(withId(R.id.city_list
    )).atPosition(0).check(matches(withText("Edmonton"))));
}
```

Important Notes

Make sure you click (alt + enter) when there is a red line error under any unrecognized term in order to import it.

These were the **imports** for this Lab demo

Java

```
package com.example.androiduitesting; import static

androidx.test.espresso.Espresso.onData;
import static androidx.test.espresso.Espresso.onView;
import static androidx.test.espresso.action.ViewActions.click;
import static
androidx.test.espresso.assertion.ViewAssertions.doesNotExist;
import static androidx.test.espresso.assertion.ViewAssertions.matches;
import static androidx.test.espresso.matcher.ViewMatchers.isDisplayed;
import static androidx.test.espresso.matcher.ViewMatchers.withId;
import static androidx.test.espresso.matcher.ViewMatchers.withText;

import static org.hamcrest.CoreMatchers.anything;
import static org.hamcrest.CoreMatchers.instanceOf;
import static org.hamcrest.CoreMatchers.is;

import androidx.test.core.app.ActivityScenario;
import androidx.test.espresso.action.ViewActions;
import androidx.test.ext.junit.rules.ActivityScenarioRule;
import androidx.test.ext.junit.runners.AndroidJUnit4;
import androidx.test.filters.LargeTest;

import org.junit.Rule;
import org.junit.Test;
import org.junit.runner.RunWith;
```

Complete code for MainActivityTest file

Java

```
package com.example.androiduitesting;

import static androidx.test.espresso.Espresso.onData;
import static androidx.test.espresso.Espresso.onView;
import static androidx.test.espresso.action.ViewActions.click;
import static
androidx.test.espresso.assertion.ViewAssertions.doesNotExist;
import static androidx.test.espresso.assertion.ViewAssertions.matches;
import static androidx.test.espresso.matcher.ViewMatchers.isDisplayed;
import static androidx.test.espresso.matcher.ViewMatchers.withId;
import static androidx.test.espresso.matcher.ViewMatchers.withText;

import static org.hamcrest.CoreMatchers.anything;
import static org.hamcrest.CoreMatchers.instanceOf;
import static org.hamcrest.CoreMatchers.is;

import androidx.test.core.app.ActivityScenario;
import androidx.test.espresso.action.ViewActions;
import androidx.test.ext.junit.rules.ActivityScenarioRule;
import androidx.test.ext.junit.runners.AndroidJUnit4;
import androidx.test.filters.LargeTest;

import org.junit.Rule;
import org.junit.Test;
import org.junit.runner.RunWith;

@RunWith(AndroidJUnit4.class)
@LargeTest
public class MainActivityTest {
    @Rule
    public ActivityScenarioRule<MainActivity> scenario = new
ActivityScenarioRule<MainActivity>(MainActivity.class);

    @Test
    public void testAddCity(){
        // Click on Add City button
        onView(withId(R.id.button_add)).perform(click());
    }
}
```

```

        // Type "Edmonton" in the editText
onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmont
on"));

        // Click on Confirm
onView(withId(R.id.button_confirm)).perform(click());

        // Check if text "Edmonton" is matched with any of the text
displayed on the screen
onView(withText("Edmonton")).check(matches(isDisplayed()));
    }

@Test
public void testClearCity(){
    // Add first city to the list
onView(withId(R.id.button_add)).perform(click());

onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmont
on"));
onView(withId(R.id.button_confirm)).perform(click());

    //Add another city to the list
onView(withId(R.id.button_add)).perform(click());

onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Vancouv
er"));
onView(withId(R.id.button_confirm)).perform(click());

    //Clear the list
onView(withId(R.id.button_clear)).perform(click());
onView(withText("Edmonton")).check(doesNotExist());
onView(withText("Vancouver")).check(doesNotExist());
}

@Test
public void testListView(){
    // Add a city
onView(withId(R.id.button_add)).perform(click());

```

```
onView(withId(R.id.editText_name)).perform(ViewActions.typeText("Edmonton"));
    onView(withId(R.id.button_confirm)).perform(click());

    // Check if in the Adapter view (given id of that adapter view),
    there is a data
    // (which is an instance of String) located at position zero.
    // If this data matches the text we provided then Voila! Our test
    should pass
    // You can also use anything() in place of
    is(instanceOf(String.class))

onData(is(instanceOf(String.class))).inAdapterView(withId(R.id.city_list
)).atPosition(0).check(matches(withText("Edmonton"))));

}

}
```